


I/O Board pn 7535P v4 PNP

- Opto Isolation
- Opto22 type 50-pin Connector
- 26pin IDC plug for controller
- PNP Sourcing type Inputs and Outputs
- 18-30VDC I/O
- 2Amp per Output
- Screw Terminals

VITAL Systems Inc

2684 Camp Branch Rd
Buford GA 30519 USA
sales@VSI99.com
www.VSI99.com

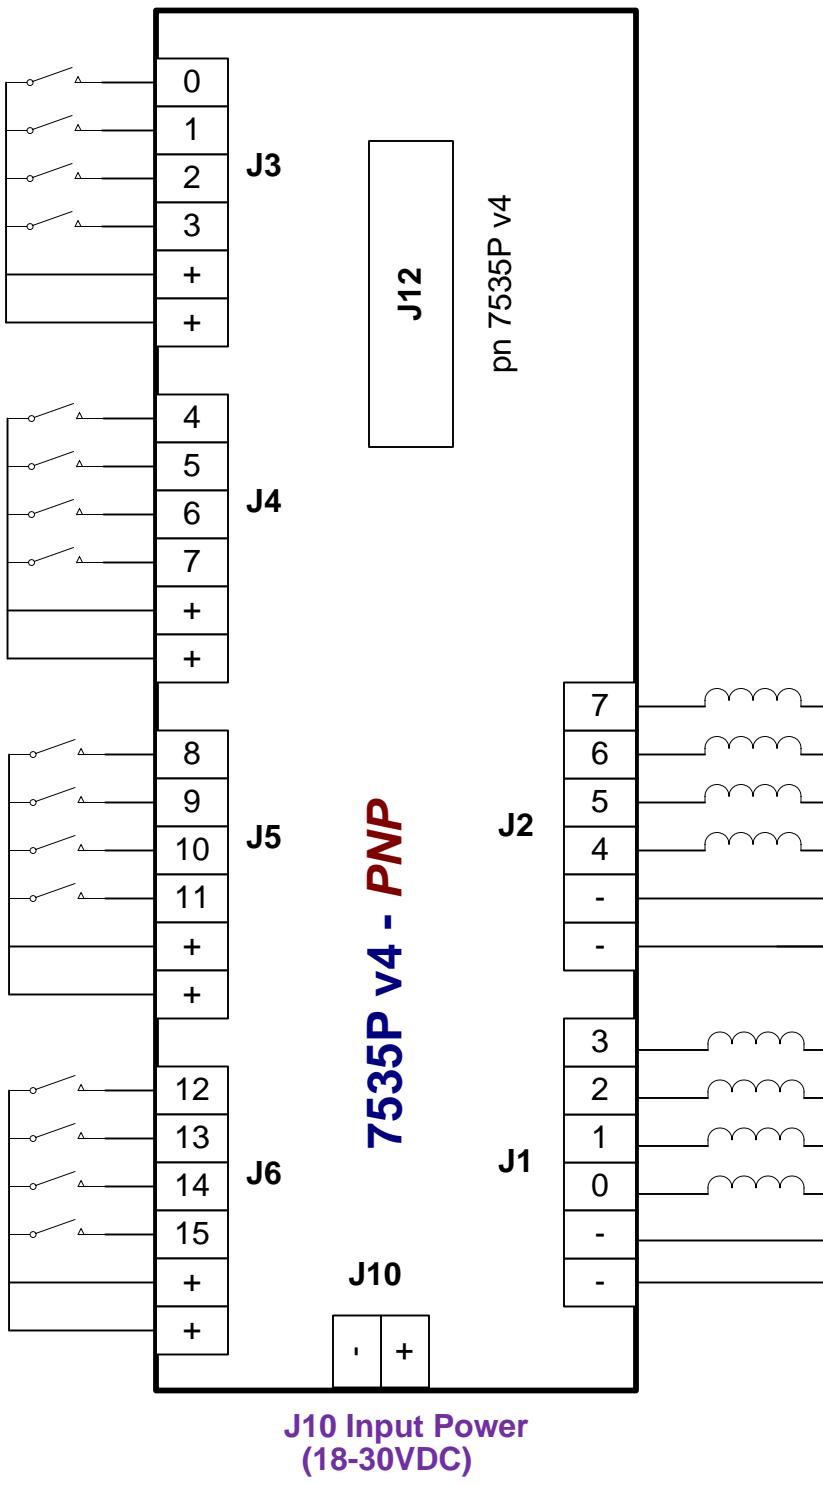

J12:
Connection to controller.

J3, J4, J5, J6 Inputs:
Optically isolated from the controller. Input voltage range 12 to 30 Volts DC. Inputs are active high, i.e., apply positive to the input terminals. Power is taken from J10.

J1, J2 Outputs:
Optically isolated from the controller. Switches DC load up to 2Amps at 12 to 30 Volts DC each. 7535P switches the positive (hot) side. Power is taken from J11.